

SCH PT520 מד זרימה לגז רטוב


Working principle

SCH PT520 Pitot tube flow meter is OUR latest technology base on different pressure technology specially designed for compressed air applications. As it has 1/2" insertion connection probe and compact designed sensor, it can be used on pipes from DN25~DN300. In some higher pressure applications, it can be installed / removed without stopping the fluid, as the pipe is thinner, field engineers will be able to insert the meter to pipe very easily. Also, due to its working principle, it is less effected by the water contents in the compressed air.

SCH PT520 Pitot tube flow meter also has integral temperature and pressure compensation, so it can measure standard flow, temperature and pressure also.

Special features


- Use self-developed industrial-grade differential pressure transmitter, which is more robust than traditional Mems solutions.
- Cellphone APP for reading and setting
- Self-diagnose and remote diagnose function to provide with best support
- Bid-directional flow measurement
- No need to set 0 point
- Measures flow rate, temperature, pressure, FAD measurement available
- Wide measurement range, turndown ratio 1:17
- Fast response time
- No mechanical wear part
- Insertion mounting, available for hot tapping.
- For both dry and wet air measurement, possible for measuring compressed air at output of compressor

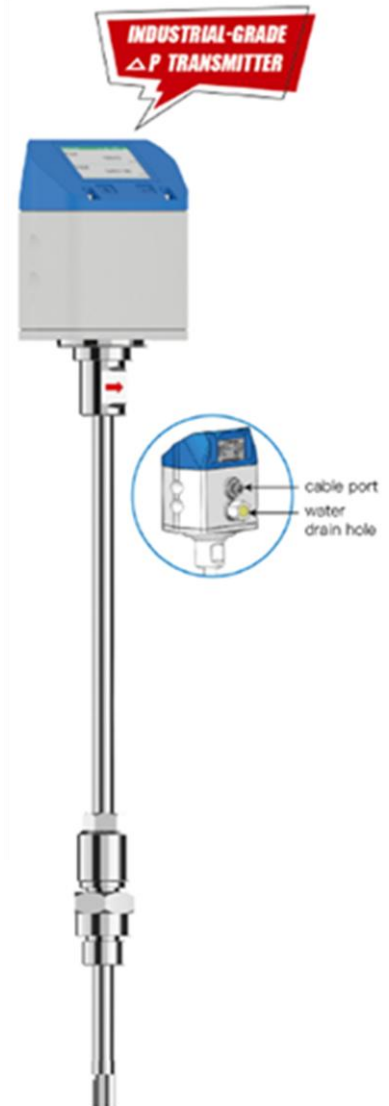

SCH PT520 מד זרימה לגז רטוב

Specification

Medium	Air and none-corrosive gas
Enclosure	PC
Pipe size range	1"~12" (DN25~DN300)
Ambient temperature	-20~60°C
Atmosphere pressure	86~106 Kpa
Ambient humidity	5~100%
Process connection	1/2 G insertion with ball valve
Pressure rating	10 barG / 16 barG
Fluid temperature	-40~ 150°C
Wet part material	304ss
Parameter measured	Flow rate, temperature , pressure
Power	20~36V DC,150mA max
Analog	2 wire active 4~20mA
Communication	RS485@Modbus-RTU, Bluetooth
Flow Accuracy	±2%RD
Pressure Accuracy	±0.25%FS
Temperature Accuracy	±0.5°C
Flow Repeatability	±0.5%RD
Response time	1 second
Ingress Protection Grade	IP65/IP67(avoid outdoor installation)

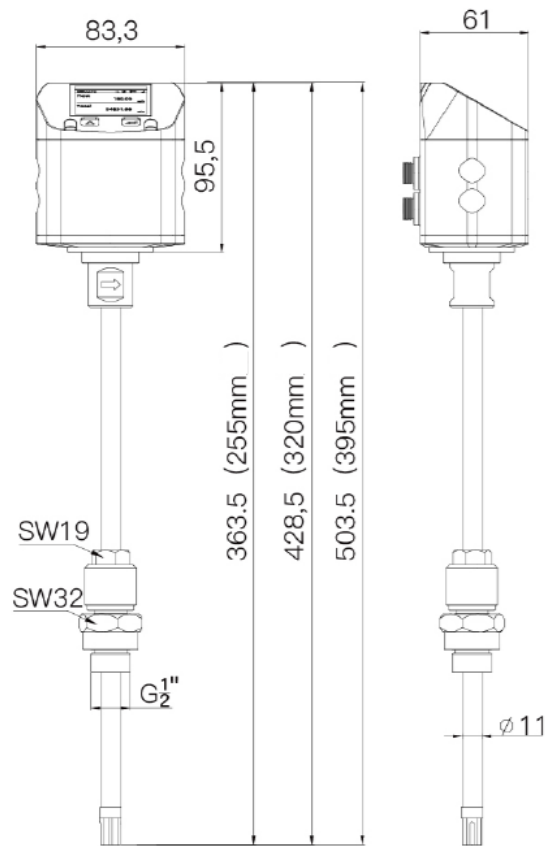

Standard flow range for compressed air @ 50 °C and different pressure, unit is Normal flow Nm³/min ref to 1.01325 barA, 0 °C

Pipe innder diameter		0 Bar G		4 Bar G		6 Bar G		7 Bar G		8 Bar G	
DN	inch	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DN25	1"	0.11	1.92	0.24	4.29	0.29	5.07	0.31	5.42	0.33	5.75
DN32	1 1/4"	0.18	3.14	0.4	7.02	0.48	8.31	0.51	8.88	0.54	9.42
DN40	1 1/2"	0.28	4.91	0.63	10.97	0.98	12.99	0.8	18.88	0.85	14.72
DN50	2"	0.44	7.66	0.99	17.14	1.71	21.28	1.25	21.69	1.32	23
DN65	2 1/2"	0.74	12.95	1.67	28.97	1.97	34.28	2.11	36.65	2.24	38.87
DN80	3"	1.13	19.63	2.54	43.89	2.99	51.94	3.2	55.52	3.4	58.89
DN100	4"	1.77	30.67	3.96	68.59	4.68	81.15	5.01	86.76	5.31	92.02
DN125	5"	2.76	47.92	6.18	107.17	7.32	126.80	7.82	135.56	8.3	143.78
DN150	6"	3.98	69.01	8.91	154.32	10.54	182.60	11.27	195.21	11.95	207.05
DN200	8"	7.08	122.69	15.84	274.36	18.74	324.62	20.03	347.04	21.25	368.09
DN250	10"	11.06	191.71	24.75	428.68	29.28	507.23	31.3	542.25	33.2	575.14
DN300	12"	15.93	276.06	35.64	617.31	42.17	730.41	45.08	780.84	47.81	828.2

שניידר אלקטרוניקה תעשייתית א.ש בע"מ- טל: 04-6094444

מייל : sales@sche.co.il אתר אינטרנט : www.sche.co.il

SCH PT520 מד זרימה לגז רטוב

Read & Set on Screen

SCH PT520 has integral TFT 2" High Resolution display with two capacitive key for setting




Read & Set on in APP

Instead of traditional keyboard, SCH PT520 implement a cellphone setting system. All SCH PT520 have Bluetooth communication. Users can install The APP on their cellphone or tablet and use the APP to connect with a SCH PT520 flow meter to read or set the flow meter.

This APP also support a remote diagnose function. Whenever there is anything wrong with the flow meter, customer can ask for a remote diagnose support. When this function is working, engineer back in office can remotely check the setting of the meter, and the signal of sensor, to provide users with most accurate trouble shooting advise.

The APP has made the using of the product simple and efficient .

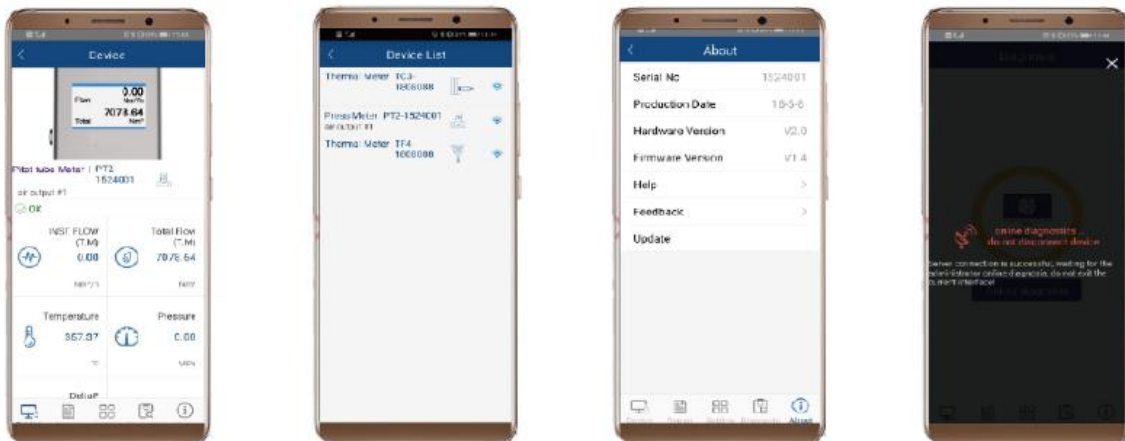

SCH PT520 מד זרימה לגז רטוב

Mode codes

1	General model	D	Insertion (G 1/2) ,anti-ejection design with ball valve	Standard
		1	255mm, 11mm dia (1"~4" or DN25-DN100)	Option
2	Probe Length	2	320mm, 11mm dia (1"~8" or DN25-DN200)	Option
		3	395mm, 11mm dia (1"~12" or DN25-DN300)	Standard
3	Probe Material	1	304 SS	Standard
		1	Carbon steel	Option
4	Socket material	2	304 SS	Standard
		3	316 SS	Option
5	Transmitter	T	Integral	Standard
6	Pressure Rating	1	10 Bar G	Standard
		2	16 Bar G	Option
7	Display and output	1	Local display, RS485, Bluetooth	Standard
		2	Local display, 4wire 4~20mA, RS485, Bluetooth	Option
		3	Local display,4 wire 4~20mA,Hart,Bluetooth	Option
8	Power supply	1	20~36VDC	Standard
		N	20~36VDC with 24VDC to AC power converter	N
9	Ingress protection grade	1	IP65	Standard
		2	IP67	Option
10	Pipe size	XXX	please use 3 digit pipe size, such as DN50=050, DN200=200	XXX

Remark:

- Hot-tap hole opener are as accessories, please remark if you need any of them
- Please indicate flow rate along with the model number selected
- If anything beyond this chart, please check with us to see the availability
- The model selected in 1st line is the standard configuration with no accessories